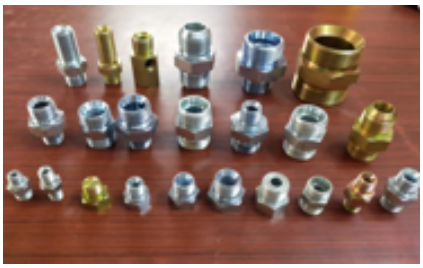
SOBTS EXIM

HYDRAULIC HOSE
AND FITTINGS

PRODUCT CATALOGUE







HOSE OF HYDRAULICS

Trading | Customized contract manufacturing | Hose and fitting solutions

COMPANY PROFILE

SOBTS EXIM

TRADING AND CUSTOM CONTRACT MANUFACTURING

SOBTS EXIM is a trader of hydraulic hoses, fittings and related products. We also support contract manufacturing tailored to customer requirements. Product selection and customized manufacturing are developed around the application and the technical details agreed with the customer.

CUSTOMIZED PRODUCT SUPPORT

Customized requirements may include hose construction, material selection, end connections, assembly configuration and other agreed specifications. Please share the application conditions and connection details when requesting a quotation.

PRODUCT RANGE

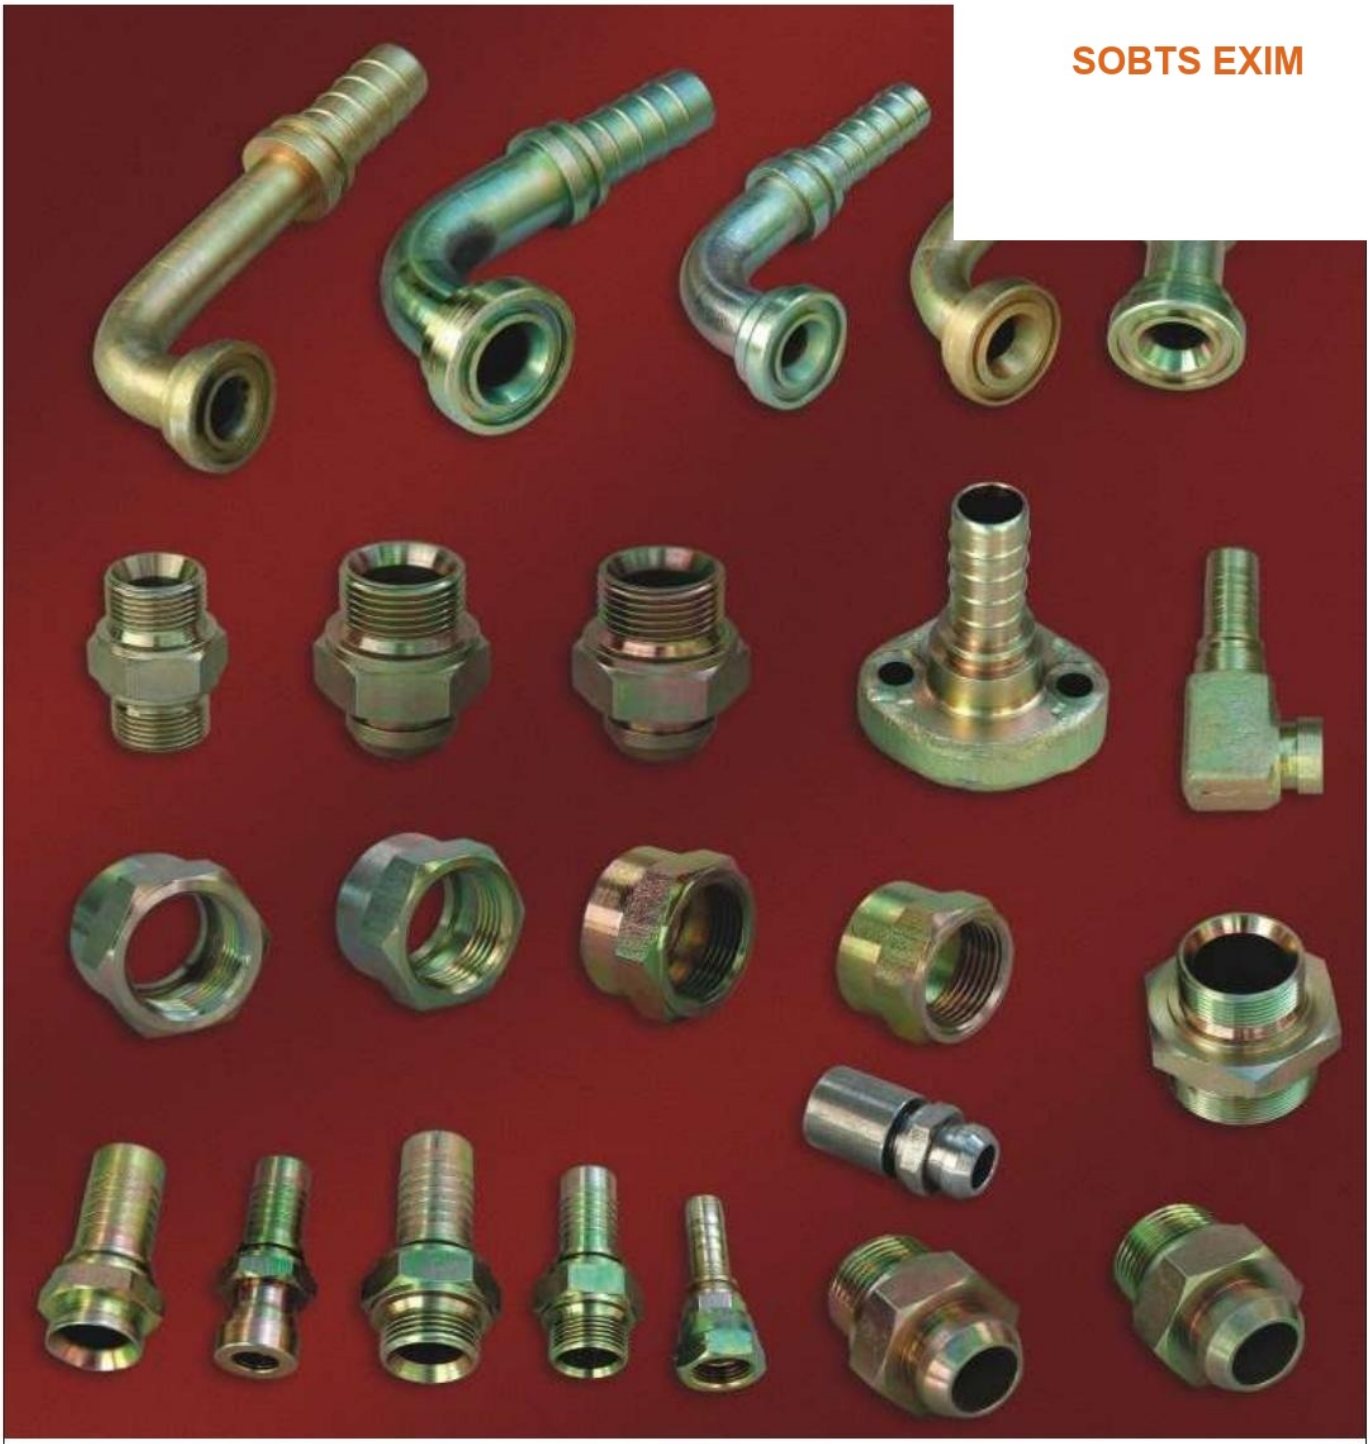
- Hydraulic hose types and specification tables
- Crimp fittings and hose end connections
- Stainless steel corrugated hose assemblies
- Mining and specialty hose applications







Product imagery and specifications in this catalogue are drawn from the supplied references.

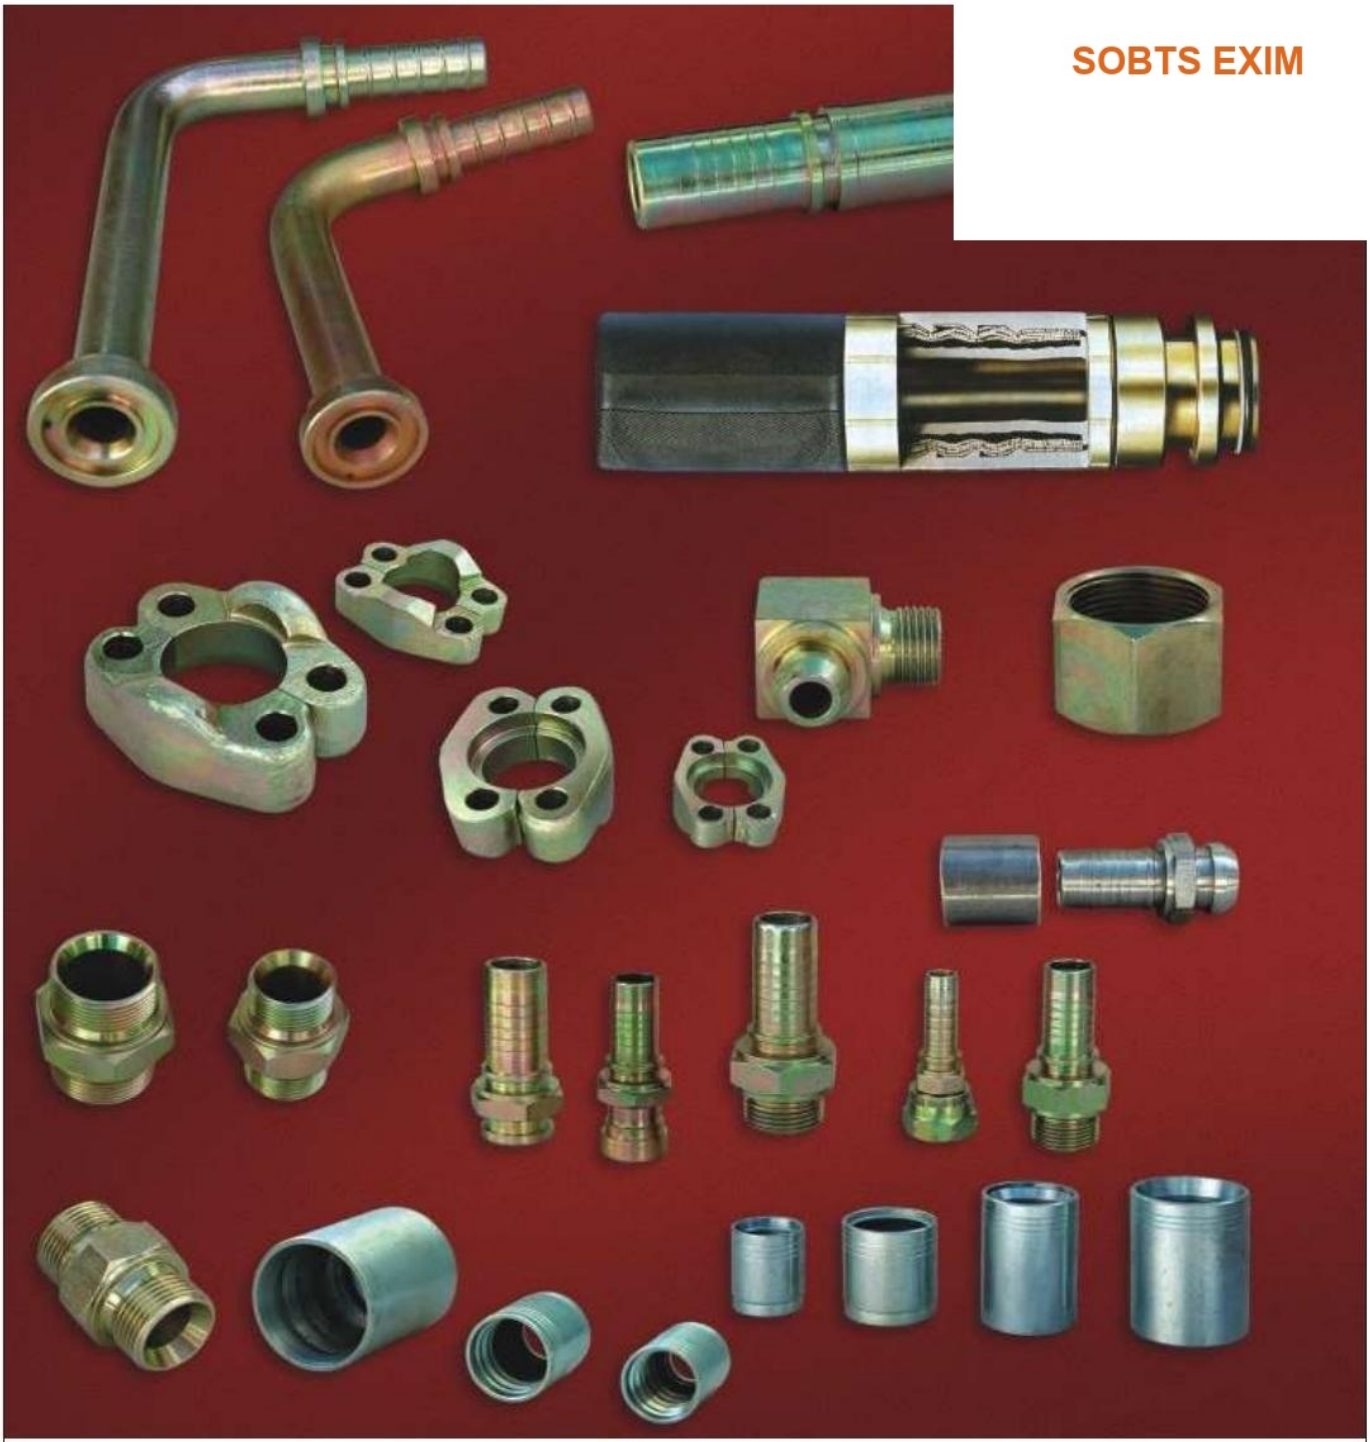


SOBTS EXIM

Power transmission, regulation, effective control of engines and brake systems-one cannot do away with hydraulics in any of these platforms. Just why hoses play a decisive role in any industrial application.

Hi-Flex industrial hoses had a modest beginning in 1983, however it didn't take quite long to emerge into one of the prominent hose traders and manufacturers providing trustworthy hydraulic solutions to a wide network all over. Owing to the excellence displayed in every level of production and control, the products are also in demand abroad.



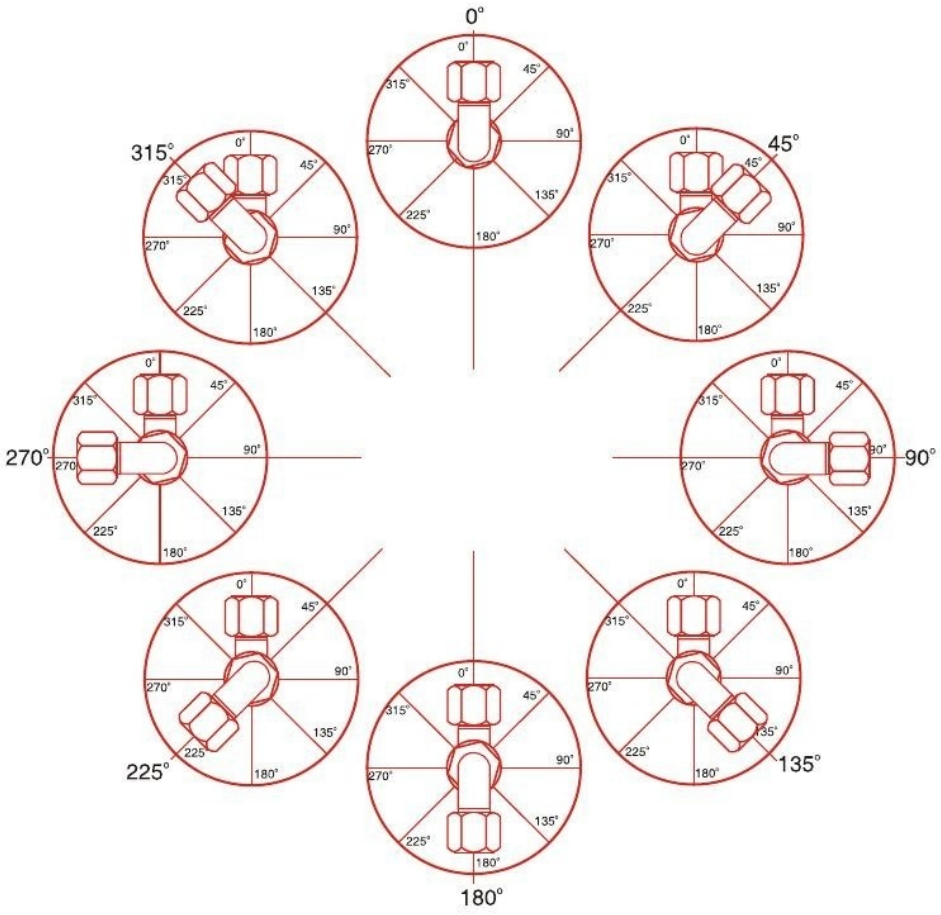


Stringent observance of SAE (Society of Automotive Engineering) standards, lasting professional relationship with companies of international repute like Markwel and Alphagoma; they all set the stage for the products that are qualified to compete with any top player. ISMAT products embrace Earth Movers, Railways, Marines, Cement Industry, Paper, Steel - in other words, the anything and everything of hydraulics

Policy: Hi-Flex is committed to provide durable, high-quality hydraulic solutions to make sure the satisfied smile in every customer. Products are carefully conceived in a way that perfection overrides in every level. ISMAT also aims to converge its passion to innovate with the ever -evolving technologies, combine an eye for the new with a spirit for achievement.

The angle of hose assemblies wit either end can be determined as follows:

Look along the hose assembly for which a designation is required, with the rear fitting away from the body pointing upwards. Now specify how many degrees the front fitting is rotated through in a clockwise direction. Tolerance +9/-3





R1AT



Application	High pressure hydraulics oils, air and water
Construction Tube	Synthetic oil resistant rubber
Reinforcement	1 high tensile steel wire braid
Cover	Synthetic rubber - abrasion, ozone and weather resistant
Temp. Range	-40C to +120C
Impulse Cycles	150,000

Hose Size						Maximum Working Pressure		Minimum Burst Pressure		Minimum Bend Radius	
Code		I.D.		R.O.D.	O.D.						
		inch	mm	mm	mm	psi	bar	psi	bar	inch	mm
6	-4	1/4	6.4	11.1	13.4	3265	225	13060	900	3.9	100
8	-5	5/16	7.9	12.7	15.0	3120	215	12480	850	4.5	105
10	-6	3/8	9.5	15.1	17.4	2610	180	10440	720	5.1	130
12	-8	1/2	12.7	18.2	20.3	2320	160	9280	640	7.1	180
16	-10	5/8	15.9	21.4	23.7	1890	130	7560	520	7.9	200
19	-12	3/4	19.0	25.4	27.7	1525	105	6100	420	9.5	240
25	-16	1	25.4	33.3	35.6	1275	88	5100	352	11.8	300
32	-20	1 1/4	31.8	40.0	43.0	915	63	3660	252	16.5	420
38	-24	1 1/2	38.1	46.4	50.4	725	50	2900	200	19.7	500
51	-32	2	50.8	59.5	63.5	580	40	2320	160	24.8	630
*60	-38	2 3/8	60.3	69.0	75.0	362	25	1450	100	30.0	762
*64	-40	2 1/2	63.5	73.0	79.5	362	25	1450	100	30.0	762
*76	-48	3	76.2	86.4	94.4	290	20	1160	80	36.0	915
*90	-56	3 1/2	90.0	98.5	105.5	220	15	880	60	42.0	1067
*100	-64	4	101.6	110.6	117.0	145	10	580	40	43.5	1105

- No under SAE/EN/DIN specifications

R2AT



Application	High pressure hydraulics oils, air and water
Construction Tube	Synthetic oil resistant rubber
Reinforcement	2 high tensile steel wire braid
Cover	Synthetic rubber - abrasion, ozone and weather resistant
Temp. Range	-40C to +120C
Impulse Cycles	200,000

Hose Size						Maximum Working Pressure		Minimum Burst Pressure		Minimum Bend Radius	
Code		I.D.		R.O.D.	O.D.						
		inch	mm	mm	mm	psi	bar	psi	bar	inch	mm
6	-4	1/4	6.4	12.7	15.1	5800	400	23200	1600	4.0	100
8	-5	5/16	7.9	14.3	16.7	5100	350	20400	1400	4.5	115
10	-6	3/8	9.5	16.7	19.1	4800	330	19200	1320	5.1	130
12	-8	1/2	12.7	19.8	22.2	4000	276	16000	1103	7.1	180
16	-10	5/8	15.9	23.0	25.4	3600	250	14400	1000	7.9	200
19	-12	3/4	19.0	27.0	29.4	3100	215	12400	860	9.4	240
25	-16	1	25.4	35.0	37.3	2400	165	9600	660	11.8	300
32	-20	1 1/4	31.8	44.5	48.3	1800	125	7200	500	16.5	420
38	-24	1 1/2	38.1	51.0	54.7	1300	90	5200	360	19.7	500
51	-32	2	50.8	63.5	67.4	1160	80	4640	320	24.8	630
*60	-38	2 3/8	60.3	71.5	75.8	1015	70	4060	280	30.0	762
*64	-40	2 1/2	63.5	76.2	82.5	1000	69	4000	276	30.0	762
*76	-48	3	76.2	89.4	96.0	650	45	2600	179	36.0	915
*90	-56	3 1/2	90.0	101.2	107.5	400	28	1600	110	42.0	1067
*100	-64	4	101.6	113.2	118.5	365	25	1460	101	43.5	1105

- No under SAE/EN/DIN specifications

R3



Application	Medium pressure hydraulic oils, air and water
Construction Tube	Synthetic oil resistant rubber
Reinforcement	2 textile braids
Cover	Synthetic rubber - abrasion, ozone and weather resistant
Temp. Range	-40C to +120C

Hose Size						Maximum Working Pressure		Minimum Burst Pressure		Minimum Bend Radius	
Code		I.D.		R.O.D.	O.D.						
		inch	mm	mm	mm	psi	bar	psi	bar	inch	mm
6	-4	1/4	6.4		14.3	1250	86	5000	345	3.0	76
8	-5	5/16	7.9		17.5	1200	83	4800	331	4.0	102
10	-6	3/8	9.5		19.0	1125	78	4500	310	4.0	102
12	-8	1/2	12.7		23.8	1000	69	4000	276	5.0	127
16	-10	5/8	15.9		27.0	875	60	3500	241	5.5	140
19	-12	3/4	19.0		31.8	750	52	3000	207	6.0	152
25	-16	1	25.4		38.1	565	39	2250	155	8.0	203
32	-20	1 1/4	31.8		44.5	375	26	1500	103	10.0	254
*38	-24	1 1/2	38.1		50.8	250	17	1000	69	12.0	306
*51	-32	2	50.8		64.0	215	15	860	60	16.1	410

* Not under SAE specifications

R6



Application	Low pressure hydraulic oils, air and water
Construction Tube	Synthetic oil resistant rubber
Reinforcement	1 textile braid
Cover	Synthetic rubber - abrasion, ozone and weather resistant
Temp. Range	-40C to +120C

Hose Size						Maximum Working Pressure		Minimum Burst Pressure		Minimum Bend Radius	
Code		I.D.		R.O.D.	O.D.						
		inch	mm	mm	mm	psi	bar	psi	bar	inch	mm
6	-4	1-/4	6.4		12.7	400	28	1600	110	2.5	64
8	-5	5/16	7.9		14.3	400	28	1600	110	3.0	76
10	-6	3/8	9.5		15.9	400	28	1600	110	3.0	76
12	-8	1/2	12.7		19.8	400	28	1600	110	4.0	102
16	-10	5/8	15.9		23.0	350	24	1400	97	5.0	127
19	-12	3/4	19.0		26.0	300	21	1200	83	6.0	152
25	-16	1	25.4		32.5	190	13	760	52	9.1	230

* Not under SAE specifications

JACK H



Application	Hydraulic jack application used in jacking systems
Construction Tube	Synthetic oil resistant rubber
Reinforcement	2 high tensile steel wire braids
Cover	Synthetic rubber - abrasion, ozone and weather resistant
Temp. Range	-40C to +50C

Hose Size						Maximum Working Pressure		Minimum Burst Pressure		Minimum Bend Radius	
Code		I.D.		R.O.D.	O.D.						
		inch	mm	mm	mm	psi	bar	psi	bar	inch	mm
6	-4	1/4	6.4	12.7	14.8	10000	690	20000	1380	4.0	102
10	-6	3/8	9.5	16.7	18.8	10000	690	20000	1380	5.0	127

R5C / R5R



Application	High pressure hydraulic oils, air and water
Construction Tube	Synthetic oil resistant rubber
Reinforcement	1 textile braid and 1high tensile steel wire braid
Cover	**R5C:** Oil and mildew resistant rubber impregnated cotton cover **R5R:** Synthetic rubber - abrasion, ozone and weather resistant
Temp. Range	Upto 7/8 inch - 150,000 1 1/8 inch and above - 100,000

Hose Size						Maximum Working Pressure		Minimum Burst Pressure		Minimum Bend Radius	
Code		I.D.		R.O.D.	O.D.						
		inch	mm	mm	mm	psi	bar	psi	bar	inch	mm
6	-5	1/4	6.4		14.4	3000	207	12000	828	3.4	86
8	-6	5/16	7.9		17.2	2250	155	9000	621	4.0	102
10	-8	13/32	10.3		19.5	2000	138	8000	552	4.6	117
12	-10	1/2	12.7		23.4	1750	121	7000	483	5.5	140
16	-12	5/8	15.9		27.4	1500	103	6000	414	6.5	165
22	-16	7/8	22.2		31.4	800	55	3200	221	7.4	187
29	-20	1 1/8	28.7		38.1	625	43	2500	172	9.0	229
35	-24	1 3/8	34.9		44.5	500	34	2000	138	10.5	267
46	-32	1 13/16	46.0		57.1	350	24	1400	97	13.2	337
60	-38	2 3/8	60.3		73.0	350	24	1400	97	21.0	610

4SP



Application	Very high pressure hydraulics
Construction Tube	Oil resistant synthetic rubber
Reinforcement	4 high tensile steel wire spirals
Cover	Synthetic rubber - abrasion, ozone and weather resistant
Temp. Range	-40C to +100C continuous +125C intermitted
Impulse Cycles	Minimum 400,000

Hose Size						Maximum Working Pressure		Minimum Burst Pressure		Minimum Bend Radius	
Code		I.D.		R.O.D.	O.D.						
		inch	mm	mm	mm	psi	bar	psi	bar	inch	mm
10	-6	3/8	9.5	17.5	21.2	6450	445	25800	1780	7.1	180
12	-8	1/2	12.7	20.2	24.4	6020	415	24070	1660	9.0	230
16	-10	5/8	15.9	23.8	28.0	5075	350	20300	1400	9.8	250
19	-12	3/4	19.0	28.2	32.0	5075	350	20300	1400	11.8	300
25	-16	1	25.4	35.3	39.5	4060	280	16240	1120	13.3	340
32	-20	1 1/4	31.8	46.0	50.6	3045	210	12180	840	18.1	460
38	-24	1 1/2	38.1	52.4	57.0	2685	185	10730	740	22.0	560
51	-32	2	50.8	65.3	69.6	2395	165	9570	660	25.9	660

4SH



Application	Extra high pressure hydraulics
Construction Tube	Oil resistant synthetic rubber
Reinforcement	4 high tensile steel wire spirals
Cover	Synthetic rubber - abrasion, ozone and weather resistant
Temp. Range	-40℃ to +100℃ continuous +125℃ intermitted
Impulse Cycles	Minimum 400,000

Hose Size						Ma... Working Pressure		Burst Pressure		Bend Radius	
Code		I.D.		R.O.D.	O.D.						
		inch	mm	mm	mm	psi	bar	psi	bar	inch	mm
19	-12	3/4	19.0	28.4	32.0	6100	420	24360	1680	11.0	280
25	-16	1	25.4	35.2	38.5	5516	380	22040	1520	13.3	340
32	-20	1 1/4	31.8	41.9	45.3	4720	325	18850	1300	18.1	460
38	-24	1 1/2	38.1	48.8	53.3	4210	290	16820	1160	22.0	560
51	-32	2	50.8	63.2	67.9	3625	250	14500	1000	27.5	700

R12



Application	Very high pressure hydraulics
Construction Tube	Oil resistant synthetic rubber
Reinforcement	4 high tensile steel wire spirals
Cover	Synthetic rubber - abrasion, ozone and weather resistant
Temp. Range	-40℃ to +100℃ continuous +121℃ intermitted
Impulse Cycles	Minimum 500,000

Hose Size						Maximum Working Pressure		Minimum Burst Pressure		Minimum Bend Radius	
Code		I.D.		R.O.D.	O.D.						
		inch	mm	mm	mm	psi	bar	psi	bar	inch	mm
10	-6	3/8	9.5	17.2	20.1	4000	276	16000	1100	5.0	127
12	-8	1/2	12.7	20.7	23.6	4000	276	16000	1100	7.0	178
16	-10	5/8	15.9	24.6	27.2	4000	276	16000	1100	8.0	203
19	-12	3/4	19.0	27.65	30.5	4000	276	16000	1100	9.5	241
25	-16	1	25.4	34.9	37.8	4000	276	16000	1100	12.0	305
32	-20	1 1/4	31.8	43.9	46.8	3000	207	12000	825	16.5	419
38	-24	1 1/2	38.1	50.4	53.3	2500	172	10000	685	20.0	508
51	-32	2	50.8	63.65	66.5	2500	172	10000	685	25.0	635

R13



Application	Extremely high pressure hydraulics
Construction Tube	Oil resistant synthetic rubber
Reinforcement	4 or 6 high tensile steel wire spirals
Cover	Synthetic rubber - abrasion, ozone and weather resistant
Temp. Range	-40℃ to +100℃ continuous +121℃ intermitted
Impulse Cycles	Minimum 500,000

Hose Size						Maximum Working Pressure		Minimum Burst Pressure		Minimum Bend Radius	
Code		I.D.		R.O.D.	O.D.						
		inch	mm	mm	mm	psi	bar	psi	bar	inch	mm
10	-6**	3/8	9.5	19.4	22.4	10000	690	40000	2760	6.0	152
12	*-8**	1/2	12.7	22.6	25.5	7500	517	30000	2070	8.0	200
19	*-12	3/4	19.0	29.0	31.9	5000	345	20000	1380	9.5	241
25	*-16	1	25.4	35.65	38.5	5000	345	20000	1380	12.0	305
32	-20	1 1/4	31.8	46.8	49.6	5000	345	20000	1380	16.5	419
38	-24	1 1/2	38.1	54.3	57.1	5000	345	20000	1380	20.0	508
51	-32	2	50.8	68.1	70.9	5000	345	20000	1380	25.0	635

* 4 spirals ** Not covered in SAE

R15



Application	Extremely high pressure, heavy duty, high impulse hydraulics
Construction Tube	Oil resistant synthetic rubber
Reinforcement	4 or 6 high tensile steel wire spirals
Cover	Synthetic rubber - abrasion, ozone and weather resistant
Temp. Range	-40℃ to +100℃ continuous +121℃ intermitted
Impulse Cycles	Minimum 500,000




Hose Size						Maximum Working Pressure		Minimum Burst Pressure		Minimum Bend Radius	
Code		I.D.		R.O.D.	O.D.						
		inch	mm	mm	mm	psi	bar	psi	bar	inch	mm
19	-12	3/4	19.0	28.4	32.0	6000	414	24000	1655	10.5	267
25	-16	1	25.4	35.2	38.5	6000	414	24000	1655	13.0	330
32	-20	1 1/4	31.8	46.8	49.6	6000	414	24000	1655	17.5	445
38	-24	1 1/2	38.1	54.3	57.1	6000	414	24000	1655	21.0	533





- Exceeds DIN 20023 4SH & SAE 100 R13 spec. particulary on Impulse test & burn pressure -(3/4" & 1") -4 high tensile steel spirals. (1 1/4" & 1 1/2") -6 high tensile steel spirals









Teflon Hose Plain PTFE tube with single stainless steel wire braid offers great resistance to corrosive chemicals and high temperatures. It is resistant to most known chemicals, acids, alkalies, oils, corrosives and gases. Working pressure is 1/4 of burst.
PTEF hose with double wire braid available for high pressure applications and where tight bend radius is required.
Temperature Range: -70℃ to +260℃
Applications: Steam lines, hot lines, corrosive chemical transfer, conveying gases and refrigerants and food processing.

Co				
TF06	6	9.3	205	80
TF08	8	10.3	195	110
TF10	9.5	12	145	130
TF12	12.5	15.5	135	165
TF16	16	18.8	90	205
TF20	19	22.5	65	225
TF25	25	28.5	50	330

Crimp Fittings			1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	1"	1.1/4"	1.1/2"	2"
H107100		BSP MALE TAPERED	1/8" 1/4" 3/8"	3/8"	3/8" 1/2"	1/2"	3/4"	3/4" 1"	1"	1.1/4"	1.1/2"	2"
H105100		BSP MALE PARALLEL 60° CONE SEAT	1/8" 1/4" 3/8"	3/8"	3/8" 1/2"	3/8" 1/2"	5/8" 3/4"	3/4"	1"	1.1/4"	1.1/2"	2"
H205120		BSP FEMALE 60° CONE CRIMP NUT	1/8" 1/4"	3/8"	1/4" 3/8" 1/2"	1/2"	5/8"	3/4"	1"			
H205130		BSP FEMALE 60° CONE SLIP-ON NUT								1.1/4"	1.1/2"	2"
H205920		90° BSP FEMALE SWEPT ELBOW 60° CONE CRIMP NUT	1/8" 1/4"	3/8"	3/8" 1/2"	1/2"	5/8"	3/4"	1"			
H205420		45° BSP FEMALE SWEPT ELBOW CRIMP NUT	1/8" 1/4"	3/8"	3/8" 1/2"	1/2"	5/8"	3/4"	1"			
H125100		JIC MALE 74° CONE	7/16" 1/2" 9/16"	5/8" 9/16"	9/16" 3/4"	3/4" 7/8"	7/8" 1.1/16"	1.1/16"	1.5/16"	1.5/8"	1.7/8"	2.1/2"
H225120		JIC FEMALE 74° CONE SEAT CRIMP NUT	7/16" 1/2" 9/16"	9/16"	9/16" 3/4"	3/4" 7/8"	7/8" 1.1/16"	1.1/16"	1.5/16"	1.5/8"	1.7/8"	2.1/2"
H225920		90° JIC FEMALE ELBOW 74° CONE SEAT CRIMP NUT	7/16" 1/2"	5/8" 9/16"	9/16" 3/4"	3/4" 7/8"	7/8" 1.1/16"	1.1/16"	1.5/16"	1.5/8"		

Crimp Fittings		1/4"	5/16"	3/8"	1/2"	5/8"					
H247920 	90° JIC FEMALE LONG DROP ELBOW 740 CRIMP NUT	7/16"		9/16"	7/8"	1.1/16"	1.1/16"	1.5/16"			
H225420 	45° JIC FEMALE 74° CONE SEAT CRIMP NUT	7/16"	9/16"	9/16" 3/4"	3/4" 7/8"	7/8" 1.1/16"	1.1/16"	1.5/16"	1.5/8"		
H124100 	ORFS MALE	9/16" 7/16"		9/16"	13/16"	1"	1 3/16"	1 7/16"	1 11/16"	2"	
H224110 	ORFS FEMALE CRIMPED BACK NUT	7/16"		9/16"	13/16"	1" 1 3/16"	1.3/16"	1.7/16"	1.11/16"	2"	
H224910 	90° ORFS FEMALE CRIMPED BACK NUT	7/16"		9/16"	13/16"	1" 1 3/16"	1.3/16"	1.7/16"	1.11/16"	2"	
H244930 	90° ORFS FEMALE LONG DROP CRIMPED BACK NUT						1.3/16"	1.7/16"			
H224410 	45° ORFS FEMALE CRIMPED BACK NUT			9/16"	13/16"		1.3/16"	1.7/16"			
H233110 	STRAIGHT SAE FLANGE 3000 psi CODE 61				-08	-08 -12	-12	-16	-20	-24	-32
H233910 	90° SAE FLANGE 3000 psi CODE 61				-08	-12	-12	-16	-20	-24	-32
H233410 	45° SAE FLANGE 3000 psi CODE 61				-08	-12	-12	-16	-20	-24	-32
H236110 	STRAIGHT SAE FLANGE 6000 psi CODE 62				-08		-12	-16	-20	-24	-32

Crimp Fittings			1/4"	5/16"	3/8"	1/2"	5/8"					
H236910		90° SAE FLANGE 6000 psi CODE 62				-08		-12	-16	-20	-24	-32
H236410		45° SAE FLANGE 6000 psi CODE 62				-08		-12	-16	-20	-24	-32
H220100		METRIC STANDPIPE STRAIGHT L.T.	6 8 10	8 10 12	10 12	12 15	18	22	28	35	42	
H220900		90° METRIC STANDPIPE L.T.	6 8	8 10	12	15	18	22	28	35	42	
H220400		45° METRIC STANDPIPE L.T.	6 8	8 10	12	15	18	22	28	35	42	
H221100		METRIC STANDPIPE STRAIGHT H.T.	6 8 10	8 10	12	16	20	25	25 30	38		
H221900		90° METRIC STANDPIPE H.T.	6 8	8 10	12	16	20	25	25 30	38		
H221400		45° METRIC STANDPIPE H.T.	6 8	8 10	12	16	20	25	25 30	38		
H215130		O RING METRIC FEMALE 24° CRIMP NUT	6 8 10	8 10 12	10 12	12 15 16	18 20 22	20 22 25	25 28 30	30 35 38	38 42	
H215920		90° METRIC FEMALE 24° CRIMP NUT	6 8 10	8 10 12	10 12	12 15 16	18 20 22	20 22 25	25 28 30	30 35 38	38 42	
H112100		METRICMALE 24 °	8 10	10 12	12	15 16	18 20	22 25	28 30	35 38	42	

Crimp Fittings		1/4"	5/16"	3/8"	1/2"	5/8"					
H240110 	JIS METRIC FEMALE 60° CONE SEAT CRIMP NUT	14x1.5	14x1.5	16x1.5	22x1.5	24x1.5	26x1.5 30x1.5	33x1.5	36x1.5		
H238110 	JIS BSP 60° CONE SEAT CRIMP NUT	1/4"		3/8"	1/2"		3/4"	1"			
H100500 	DOUBLE CONNECTOR	1/4"		3/8"	1/2"		3/4"	1"			
M..IP.. 	BRAZING TAIL	1/4" -6		3/8" -12	1/2" 15 16	5/8" -18	3/4" -22	1" -28	1.1/4" -35		
O833080 	SAT SPLIT FLANGE 3000 PSI CODE 61				-08	-12	-12	-16	-20	-24	-32
O836090 	SAE SPLIT FLANGE 6000 PSI CODE 62				-08		-12	-16	-20	-24	-32



SOBTS EXIM • PRODUCT APPLICATIONS

Mining and specialty hoses

Solutions for demanding mining and industrial service







The supplied product information covers mining, tunneling, drilling and plant applications. Hose selection should be matched to operating conditions and the equipment connection requirements.

- Underground and open-cast mining
- Drilling, cutting, rock drills, bolting and support equipment
- Pneumatic hoses, tunneling and shotcrete
- Bentonite spray, slurry transport, water cooling and dewatering
- Blast hose for ammonium nitrate and emulsion matrix
- Dust collection on surface drills
- Washing, beneficiation, grinding, mixing, filtering, sludge and magnetic separation

MINEXPERT BCS174

The source describes abrasion-resistant hose with high flexibility, low force to bend, low-friction covers, fatigue resistance, flame retardancy and MSHA approval. Skive, interlock and no-skive fitting solutions are listed.

SOBTS EXIM • FLEXIBLE METAL HOSE

Stainless steel corrugated hose assemblies

Material, temperature and connection details from supplied Word reference



CONSTRUCTION

Annular corrugated flexible metal hose made from longitudinally welded tube, mechanically corrugated, with or without braid.

REFERENCE STANDARD

EN ISO 10380

DETAIL	SOURCE SPECIFICATION
Hose material	Stainless steel AISI 304, 321, 316L
Braid material	Stainless steel AISI 304 and 316L
Temperature range	–270°C to +600°C
End connections	Threaded, welded and flanged ends
Custom ends	Flanges and connections to customer specification

INDUSTRIES AND SERVICE

The supplied reference lists plastics processing, cable manufacturing, food, pharmaceutical and chemical industries. Metallic hose assemblies are described for vibration absorption, flexibility, corrosion and chemical resistance.

SOBTS EXIM

THANK YOU

FOR CONSIDERING SOBTS EXIM

We welcome enquiries for hydraulic hoses, fittings, hose assemblies and customized contract manufacturing.







LET US DISCUSS YOUR REQUIREMENTS

Share your application, working conditions, hose size, required end connections and any applicable technical specifications so that product selection or customized manufacturing can be discussed.

SOBTS EXIM

Raj Nagar Extension, Ghaziabad 201017, Uttar Pradesh

Email: sobtsexim@gmail.com

Phone: 9999032818